

Panic Button (EAS/FB8/P)


The Fixed Panic Button is used to activate the panic alarm.

1 PANIC BUTTON

Pressing this button for 3 seconds will trigger the panic alarm regardless of whether the system is Armed or Disarmed.

2 TX INDICATOR

When the Red Panic button is pressed, the TX LED will flash to indicate the EAS/FB8/P has successfully sent out a signal to the Control Panel.

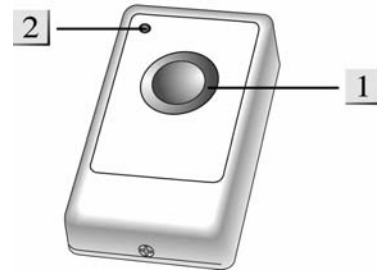

● Battery

The Fixed Panic Button uses one 12V 35mAh alkaline battery as its power source. The battery is good for approximately 2,600 signal transmissions before it needs changing.

EAS/FB8/P can also detect the low battery status. The low battery signal will be sent to the Control Panel along with regular signal transmission for the Control Panel to display the status accordingly.

● Getting Started

- Remove the screw to separate the top cover from the base.
- Insert the battery with negative of the battery on the spring side.
- Place the top case over the base and tighten them with the screw.
- Put the Control Panel into "Device +/-" menu and then select "Add Device" menu.
- Press any buttons on the EAS/FB8/P.
- Refer to the operation manual of your control panel under the section of "Device +/-" to complete the learn-in process.

● Mounting the EAS/FB8/P

There are two ways to mount the EAS/FB8/P by either Self-adhesive installation or Screw mounting.

● Self adhesive installation

- I. Clean the surface with a suitable degreaser.
- II. Remove the protective covering from one side of the double-sided adhesive pad and firmly apply to the back of the device.
- III. Next remove the other cover and firmly press the item onto the desired location.

< NOTE >

- ☞ Do not use the adhesive pad method of installation on a surface with peeling or cracked paint, or on a rough surface.

● Screw Mounting

The base has two knockouts, where the plastic is thinner for mounting purpose. To mount the EAS/FB8/P:

- I. Remove the screw to separate the top cover from the base.
- II. Break through the knockouts on the base.
- III. Using the holes as a template, drill two holes and insert the wall plug.
- IV. Screw the base into the wall plug.
- V. Screw the top cover back on to its base